

UN 38.3 TEST SUMMARY

Basic Information

Manufacturer	LG Energy Solution, LTD. 188, Munji-ro, Yuseong-gu, Daejeon, Republic of Korea Telephone : +82-2-3777-1114 E-mail : kkammy@lgensol.com Website : www.lgensol.com
Test Laboratory	LG Energy Solution (Nanjing) Co., Ltd. NO.17-18 Hengyi Road, NO.26 Hengfei Road, Nanjing Economic & Technological Development Zone, Nanjing City, Jiangsu Province, China Telephone : +86-025-85603000-8288 E-mail : lixueyan@lgensol.com Website : www.lgensol.com


Cell/Battery Information

Cell/Battery Type	Rechargeable Lithium Ion Battery
Physical Description	Pouch shape
Model Name	EB-BF966ABY L, EB-BF966ABE L
Ratings	3.9 V, 2126 mAh, 9.25 Wh
Mean Mass	28.473 g

Test Information

Test Report Number	250326-[UN 38.3-SB] EB-BF966ABY L, EB-BF966ABE L
Date of Test Report	2025-03-26
Edition of UN Manual Used	Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8, section 38.3

Test Results

T.1 : Altitude Simulation	PASS	T.5 : External Short Circuit	PASS
T.2 : Thermal Test	PASS	T.6 : Crush	PASS
T.3 : Vibration	PASS	T.7 : Overcharge	PASS
T.4 : Shock	PASS	T.8 : Forced Discharge	PASS
Approved by	Xueyan Li/Part Leader Platform Verification part DQA.T LG Energy Solution, Ltd. E-mail: lixueyan@lgensol.com	Signatory 	

TEST REPORT

UN 38.3 Revision 8

Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8, section 38.3

Report Number..... : 250326-[UN 38.3-SB] EB-BF966ABY L, EB-BF966ABE L
 Standard..... : UN 38.3 Revision 8
 Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8, section 38.3
 Manufacturer's Name..... : LG Energy Solution, LTD.
 Address : 188, Munji-ro, Yuseong-gu, Daejeon, Republic of Korea
 Product Type..... : Rechargeable Lithium Ion Battery
 Figure of Single Cell..... : Pouch shape
 Model Name..... : EB-BF966ABY L, EB-BF966ABE L
 Ratings : 3.9 V, 2126 mAh, 9.25 Wh
 Mean Mass..... : 28.473 g
 Electrolyte type of single cell..... : ☐ Gel polymer ☐ Solid polymer ☒ N/A
 Date of issue : 2025-03-26

Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):

Test Laboratory's Name..... : LG Energy Solution (Nanjing) Co., Ltd.
 Address : NO.17-18 Hengyi Road, NO.26 Hengfei Road, Nanjing Economic & Technological Development Zone, Nanjing City, Jiangsu Province, China
 Prepared by..... : Jie Ma / Engineer



Approved by..... : Xueyan Li / Part Leader




[WARNING]

All information contained herein corresponds to trade secrets held by LG Energy Solution, LTD. ("Company"). If you transmit or disclose any information in this document to a third party without prior consent from the company, or use it for non-business purposes, for illegal purposes, or for personal use, you will be liable for civil and criminal liability according to relevant laws It's possible.

Test Results				
Clause	Test Item	Sample No.	Test Result	Remark
38.3.4.1	T.1 : Altitude Simulation	SB1# ~ SB10#	P	/
38.3.4.2	T.2 : Thermal Test		P	/
38.3.4.3	T.3 : Vibration		P	/
38.3.4.4	T.4 : Shock		P	/
38.3.4.5	T.5 : External Short Circuit		P	/
38.3.4.6	T.6 : Impact	/	N/A	/
	T.6 : Crush	C11# ~ C20#	P	/
38.3.4.7	T.7 : Overcharge	SB11# ~ SB18#	P	/
38.3.4.8	T.8 : Forced Discharge	C21# ~ C40#	P	/

Sample Photo

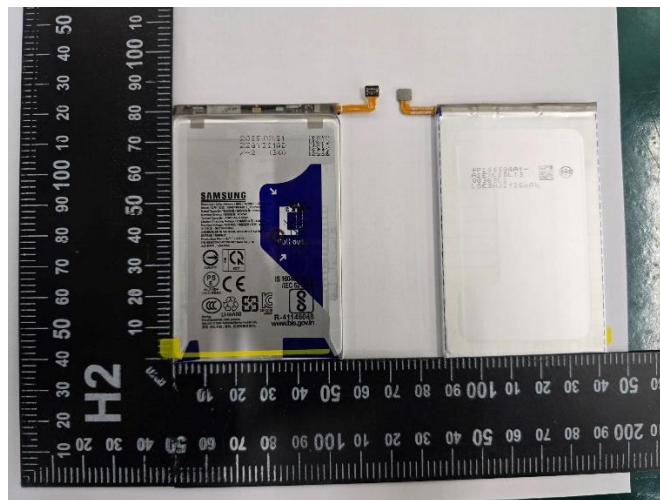

Technical Parameters:

Nominal Voltage	(V)	3.9
Rated Capacity	(mAh)	2126
Standard Charge Current	(mA)	425.2
Standard Discharge Current	(mA)	425.2
Discharge Cut-off Voltage	(V)	2.75
Maximum Charge Voltage	(V)	4.50
Maximum Charge Current	(mA)	2763.8
Maximum Discharge Current	(mA)	2126

Remark:

The table of Tests T.6 and T.8 is referring to the related cell test report (250322-[UN 38.3-C] P265584A1 Test Report)

Manual of Tests and Criteria		
Item	Test Condition	Criteria
*T.1 : Altitude Simulation	1) Store sample at 20±5°C and 11.6kPa for 6hours	- After OCV (%) ≥ 90% - No leakage, no venting, no disassembly, no fire, no rupture - Mass loss limit(leakage) $M < 1\text{g}$, no exceed 0.5% $1\text{g} \leq M \leq 75\text{g}$, no exceed 0.2% $M > 75\text{g}$, no exceed 0.1%
*T.2 : Thermal Test	1) Sample is subjected to temperature cycling - 72±2°C for 6hours ↔ -40±2°C for 6hours - Maximum 30min for Interval time - 10cycles 2) Store sample at 20±5°C for 24hours	
*T.3 : Vibration	1) Sample is subjected to sinusoidal vibration - 7Hz ↔ 200Hz ↔ 7Hz in 15min x 12times x 3direction - Sinusoidal waveform with a logarithmic sweep - Small : 7Hz to 18Hz (maintaining 1gn), 50Hz (until 8gn), 200Hz (maintaining 8gn), 1.6mm total excursion - Large : 7Hz to 18Hz (maintaining 1gn), 25Hz (until 2gn), 200Hz (maintaining 2gn), 1.6mm total excursion	
*T.4 : Shock	1) Sample is subjected to three shocks in each direction of three mutually perpendicular - Half sine shock - Small : Peak acceleration 150gn or $\sqrt{(100850/\text{mass}(\text{kg}))}$ (whichever is smaller), Pulse duration 6msec - Large : Peak acceleration 50gn or $\sqrt{(30000/\text{mass}(\text{kg}))}$ (whichever is smaller), Pulse duration 11msec - 6direction(±x, ±y, ±z) x 3cycles	
*T.5 : External Short Circuit	1) Store sample at 57±4°C at least 6hours or until reach 57±4°C 2) Short sample by connecting resistance of less than 100mΩ at 57±4°C 3) Sample remains on test until 1hours after temperature has returned 57±4°C	- No disassembly, No rupture, no fire within 6hours after test - Maximum Temperature ≤ 170°C
T.6 : Impact - Cylindrical cells ≥ 18.0mm in diameter	1) Place 15.8±0.1mm diameter type 316 steel bar on center of the sample at 20±5°C 2) Drop 9.1±0.10kg weight from a height of 610±25mm at the intersection of the bar and sample	- No disassembly, no fire within 6hours after test - Maximum Temperature ≤ 170°C
T.6 : Crush - Cylindrical cells < 18.0mm in diameter - Other shapes	1) Crush sample between two plat surfaces by using 13±0.78kN force at 20±5 °C 2) 13±0.78kN has been applied, or voltage drops by at least 100 mV, or cell is deformed by 50 % or more of its original thickness has been obtained, the force is released	
T.7 : Overcharge	1) Charge sample at 20±5°C until 24hours - Test current : Maximum charge current x 2 - Test voltage for standard charge voltage ≤ 18V : V(min.) = 2 x Maximum charge voltage or 22V - Test voltage for standard charge voltage > 18V : V(min.) = 1.2 x Maximum charge voltage	- No disassembly, no fire for 7 days after test
T.8 : Forced Discharge	1) Discharge sample by connecting in series with 12V DC power supply and resistive load for calculated time interval at 20±5°C - Load : $R_t((12\text{V} + V_c) / \text{Maximum discharge current}) - R_c - R_w$ - Time interval : Rated capacity / Maximum discharge current	- No disassembly, no fire for 7 days after test
*Tests T.1 to T.5 shall be conducted in sequence on the same cell or battery.		

TABLE: T.1 Altitude Simulation							P
Sample No.	Before Test		After Test		Mass loss (%)	Residual OCV (%)	Results
	Mass(g)	OCV(V)	Mass(g)	OCV(V)			
Fully charged at first cycle							
SB1#	28.471	4.4739	28.470	4.4722	0.004	99.96	O
SB2#	28.510	4.4751	28.509	4.4733	0.004	99.96	O
SB3#	28.452	4.4745	28.451	4.4729	0.004	99.96	O
SB4#	28.535	4.4745	28.534	4.4728	0.004	99.96	O
SB5#	28.420	4.4749	28.419	4.4732	0.004	99.96	O
Fully charged after 25 cycles							
SB6#	28.393	4.4851	28.394	4.4837	0.000	99.97	O
SB7#	28.552	4.4854	28.551	4.4838	0.004	99.96	O
SB8#	28.480	4.4773	28.480	4.4760	0.000	99.97	O
SB9#	28.481	4.4763	28.481	4.4752	0.000	99.98	O
SB10#	28.438	4.4764	28.438	4.4754	0.000	99.98	O
Results: O = No leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%							

TABLE: T.2 Thermal test							P
Sample No.	Before Test		After Test		Mass loss (%)	Residual OCV (%)	Results
	Mass(g)	OCV(V)	Mass(g)	OCV(V)			
Fully charged at first cycle							
SB1#	28.470	4.4722	28.460	4.3753	0.035	97.83	O
SB2#	28.509	4.4733	28.499	4.3756	0.035	97.82	O
SB3#	28.451	4.4729	28.443	4.3774	0.028	97.86	O
SB4#	28.534	4.4728	28.524	4.3773	0.035	97.86	O
SB5#	28.419	4.4732	28.410	4.3812	0.032	97.94	O
Fully charged after 25 cycles							
SB6#	28.394	4.4837	28.384	4.3880	0.035	97.87	O
SB7#	28.551	4.4838	28.541	4.3861	0.035	97.82	O
SB8#	28.480	4.4760	28.471	4.3835	0.032	97.93	O
SB9#	28.481	4.4752	28.474	4.3844	0.025	97.97	O
SB10#	28.438	4.4754	28.430	4.3878	0.028	98.04	O
Results: O = No leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%							

TABLE: T.3 Vibration							P
Sample No.	Before Test		After Test		Mass loss (%)	Residual OCV (%)	Results
	Mass(g)	OCV(V)	Mass(g)	OCV(V)			
Fully charged at first cycle							
SB1#	28.460	4.3753	28.460	4.3748	0.000	99.99	O
SB2#	28.499	4.3756	28.500	4.3750	0.000	99.99	O
SB3#	28.443	4.3774	28.443	4.3768	0.000	99.99	O
SB4#	28.524	4.3773	28.525	4.3768	0.000	99.99	O
SB5#	28.410	4.3812	28.411	4.3807	0.000	99.99	O
Fully charged after 25 cycles							
SB6#	28.384	4.3880	28.384	4.3876	0.000	99.99	O
SB7#	28.541	4.3861	28.542	4.3857	0.000	99.99	O
SB8#	28.471	4.3835	28.471	4.3830	0.000	99.99	O
SB9#	28.474	4.3844	28.473	4.3840	0.004	99.99	O
SB10#	28.430	4.3878	28.430	4.3873	0.000	99.99	O
Results: O = No leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%							

TABLE: T.4 Shock							P
Sample No.	Before Test		After Test		Mass loss (%)	Residual OCV (%)	Results
	Mass(g)	OCV(V)	Mass(g)	OCV(V)			
Fully charged at first cycle							
SB1#	28.460	4.3748	28.461	4.3746	0.000	100.00	O
SB2#	28.500	4.3750	28.502	4.3749	0.000	100.00	O
SB3#	28.443	4.3768	28.444	4.3767	0.000	100.00	O
SB4#	28.525	4.3768	28.526	4.3766	0.000	100.00	O
SB5#	28.411	4.3807	28.411	4.3805	0.000	100.00	O
Fully charged after 25 cycles							
SB6#	28.384	4.3876	28.387	4.3873	0.000	99.99	O
SB7#	28.542	4.3857	28.543	4.3855	0.000	100.00	O
SB8#	28.471	4.3830	28.470	4.3828	0.004	100.00	O
SB9#	28.473	4.3840	28.475	4.3838	0.000	100.00	O
SB10#	28.430	4.3873	28.430	4.3871	0.000	100.00	O
Results: O = No leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%							

TABLE: T.5 External Short Circuit				P
Sample No.	Ambient (°C) (At 57 ±4 °C)	Testing resistance (mΩ)	Max. External Temperature (°C)	Results
Fully charged at first cycle				
SB1#	57.00	80.80	57.88	O
SB2#	57.00	83.40	57.78	O
SB3#	57.00	86.10	56.90	O
SB4#	57.00	81.60	57.17	O
SB5#	57.00	82.50	57.12	O
Fully charged after 25 cycles				
SB6#	57.00	80.80	57.92	O
SB7#	57.00	83.40	57.84	O
SB8#	57.00	86.10	57.12	O
SB9#	57.00	81.60	57.24	O
SB10#	57.00	82.50	57.30	O
Results: O = No disassembly, no rupture, no fire during the test and within six hours after the test.				

TABLE: T.6 Impact					N/A
TABLE: T.6 Crush					P
Sample No.	Max. External Temperature (°C)	Results	Sample No.	Max. External Temperature (°C)	Results
50% of the design rated capacity at first cycle			50% of the design rated capacity after 25 cycles		
C11#	20.99	O	C16#	20.15	O
C12#	20.53	O	C17#	19.49	O
C13#	19.69	O	C18#	19.46	O
C14#	20.71	O	C19#	19.91	O
C15#	19.53	O	C20#	19.47	O
Results: O = No disassembly, no fire during the test and within six hours after this test.					

TABLE: T.7 Overcharge					P
The test current					5.528 A
The test voltage					9.000 V
Sample No.	OCV(V)	Results	Sample No.	OCV(V)	Results
Fully charged at first cycle			Fully charged after 25 cycles		
SB11#	4.4737	O	SB15#	4.4775	O
SB12#	4.4746	O	SB16#	4.4765	O
SB13#	4.4788	O	SB17#	4.4764	O
SB14#	4.4750	O	SB18#	4.4852	O
Results: O = No disassembly, no fire during the test and within seven days after this test.					

TABLE: T.8 Forced discharge					P
Sample No.	OCV(V)	Results	Sample No.	OCV(V)	Results
Fully discharged at first cycle			Fully discharged after 25 cycles		
C21#	3.4991	O	C31#	3.5096	O
C22#	3.4890	O	C32#	3.5134	O
C23#	3.4993	O	C33#	3.5192	O
C24#	3.5145	O	C34#	3.5246	O
C25#	3.5073	O	C35#	3.5223	O
C26#	3.4874	O	C36#	3.5363	O
C27#	3.5149	O	C37#	3.5279	O
C28#	3.5040	O	C38#	3.5312	O
C29#	3.4847	O	C39#	3.5261	O
C30#	3.5000	O	C40#	3.5187	O
Results: O = No disassembly, no fire during the test and within seven days after this test.					